


PVC Clear Vinyl Tube (CVT)

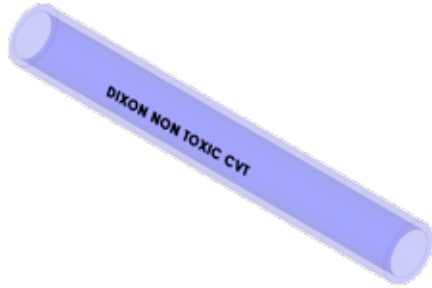

Application:	Low pressure air, water, food, beverage and medical drainage
Temperature Range:	-10°C to 60°C
Tube:	Clear smooth tubing, blue tint
Special Features:	Non-toxic; food grade
Standards:	Complies with AS2070:1999 for food contact

Part No.	Dimensions (mm)		Working Pressure		BP psi	Weight kg/mtr	Length (mtr)	Price \$ per mtr / coil
	ID	OD	psi	MPa				
H1600330C	3	5	114	0.8	342	0.02	30	22.20
H16003200R	3	5	114	0.8	342	0.02	200	147.90
H1600530C	5	8	102	0.7	305	0.03	30	25.05
H16005100S	5	8	102	0.7	305	0.03	100	83.47
H1600630C	6	9	89	0.6	267	0.04	30	28.98
H16006100S	6	9	89	0.6	267	0.04	100	96.62
H1600830C	8	11	73	0.5	219	0.05	30	33.43
H16008100S	8	11	73	0.5	219	0.05	100	111.47
H1601030C	10	13	60	0.4	180	0.07	30	36.64
H1601075R	10	13	60	0.4	180	0.07	75	91.60
H1601230C	12.5	16.5	60	0.4	180	0.12	30	64.01
H1601250S	12.5	16.5	60	0.4	180	0.12	50	106.66
H1601630C	16	20	60	0.4	180	0.14	30	80.68
H1601930C	19	23	43	0.3	150	0.16	30	91.03
H1602030C	20	24	50	0.3	150	0.16	30	97.39
H1602530C	25	31	44	0.3	132	0.32	30	186.40
H1603230C	32	38	29	0.2	87	0.4	30	237.84
H1604015C	40	46	29	0.2	87	0.56	15	198.46
H1605015C	50	60	29	0.2	87	1	15	296.58

C= Coil, R= Reel, S= Spool

Price Group: HP

DA20

* Denotes figure is calculated as theoretical.

Complete hose data specification sheets are available upon request.

