DATA SHEET

AUSG Heavy Duty Water Suction & Delivery Hose

The Right Connection®

Water and light slurry suction and delivery hose used in construction, mining, agricultural, irrigation, and municipal applications.

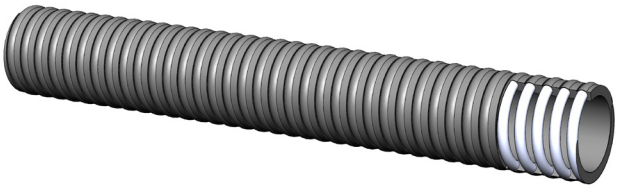

Hose Construction

Tube: PVC smooth - grey
Cover: PVC smooth - grey
Reinforcing: PVC embedded helix rigid - white

Features

- UV stabilised
- Abrasion resistant
- Non-toxic
- Food grade FDA approved

Temperature

- -20°C to 60°C

Standards

- Nil

Part Number

- To view available part number options please click here

Dimensions (mm)		Pressures				Vacuum (bar)	Weight (kg/mtr)	Bend Radius (mm)	Coil Lengths
		Working		Burst					
ID	OD	psi	bar	psi	bar				
25.4	31.5	90	6.0	260	18.0	1.0	0.39	75	20
31.8	39.1	80	5.5	240	16.5	1.0	0.51	105	20
38.1	46.2	75	5.0	220	15.0	1.0	0.65	155	20
50.8	60.7	75	5.0	220	15.0	1.0	1.10	205	20
63.5	74.4	75	5.0	220	15.0	1.0	1.50	255	20
76.2	87.1	60	4.0	180	12.0	1.0	1.80	305	20
101.6	115.1	50	3.5	150	10.5	1.0	3.00	380	20
127.0	141.0	35	2.5	105	7.5	1.0	3.93	560	20
152.4	169.4	30	2.0	90	6.0	1.0	5.51	635	20

Product Code: DA17