
DATA SHEET

Minsup® Double Bolt Claw Clamp



A rugged two bolt hose clamp suitable for use with both rubber and PVC hoses. Featuring gripping fingers which interlock with the stem for a secure assembly. Engineered from carefully selected materials to provide the highest level of performance and durability.

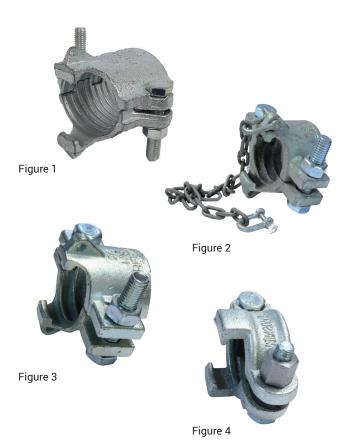

Applications

- Mining
- Air and Water services
- · Wide range of industrial applications

Features

- Positive bolt head location to prevent bolt spinning when tightening
- Gripping fingers provide positive engagement with Minsup hose stem

Materials

- SG Iron ISO 1083
- Zinc Plated to AS1789
- Inserts in 1/2", 3/4" and 1" Nylon
- Steel Zinc Plated bolts Grade 8.8
- Nuts S1214 Mild Steel Zinc Plated

Working Pressure:

- 1/2" to 1" 500 psi max working pressure
- 1 1/2" to 2" 300psi max working pressure (when used with Minsup stems)

Notes

- Check hose OD to select clamp.
- Refer assembly procedure for correct installation.
- For use with Minsup stems

Part Number	Hose ID	Hose OD		Bolt Torque	With Chain
		min	max	Ft/lbs	with Glidili
08/023/42/000 4	1/2"	22	28	20	-
08/023/43/000 4	3/4"	29	34	20	-
08/023/46/000 4	1"	35	40	30	-
<u>08/023/05/000</u> ³	1 1/2"	51.0	58.0	50	-
08/023/06/000 2	1 1/2"	51.0	58.0	50	Yes
08/023/03S/00 ¹	2"	63.0	68.0	60	-
<u>08/023/03/000</u> ³	2"	65.5	71.0	60	-
08/023/04/000 2	2"	65.5	71.0	60	Yes

Product Group: AC03

© 2020 APAC • Minsup Double bolt clamp November2021