¹⁸² Industrial Hose Fittings

Boss[™] Washer Seal




- recommended for steam service up to 230°C
- easy to seal
- Klingersil® C-4401 washer is inserted between the stem and spud
- leakproof seal forms by rotating the wing nut and hammering it tight
- *plated steel* and / or *iron* use with Boss™ clamps in this catalogue •



Coupling with Female Spud								
Size (inch)	Size (mm)	Part No.	Price \$					
3/8	9.5	WF3	43.54					
1/2	15	WF6	76.59					
3⁄4	20	WF26	75.39					
1	25	WF36	86.51					
1¼	32	WF51	171.17					
11/2	40	WF61	169.16					
2	50	WF81 ¹	228.46					
21/2	65	WF96	579.63					
3	75	WF111	435.57					
			Price Group: SD					

Washer Type

AD01

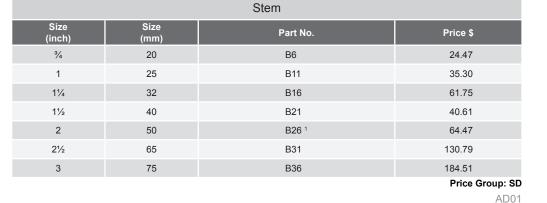



• **Not to be used with #250, #275 or #306 Boss™ Clamps

Boss™ Wing Nut for Ground Joint & Washer Seals Wing Nut



plated iron / steel



316 stainless steel



Size (inch)	Size (mm)	Plated Steel and / Iron		316 Stainless Steel		Brass		
		Part No.	Price \$	Part No.	Price \$	Part No.	Price \$	
1/4	6*	BA2 ²	17.54					
1/2	15	B2	32.64					
3⁄4	20	B12	24.04	RB12	67.32	BB12	96.56	
1	25							
1¼	32	B17	34.20	RB17	170.89	BB17	201.82	
11⁄2	40							
2	50	B27	62.56	RB27	282.33	BB27	322.41	
21/2	65	B32	138.11					
3	75	B37	102.40					
4	100	B47	312.98					
6	150*	B67	344.11					
² BA2 not for use with the Boss™ Washer Seal. Price Group: SL								

• * Washer is a Klinger nylon, Nitrile bonded, Kevlar reinforced material. • **Not to be used with #250, #275 or #306 Boss™ Clamps



All prices exclude GST. **ADPL718**